



Item # \_\_\_\_\_

Job \_\_\_\_\_

# HD SUPER™ DUNNAGE SHELVES

HDR Series

- **Superior Strength:** Dunnage shelves offer up to 133% more weight-bearing capacity than other HD Super shelves and can be combined with them to provide extra strength at the lower levels of a shelving unit where the heaviest loads will be placed. The 48" (1219mm) length has a 3,000-pound (1365kg) uniformly distributed static load capacity; the 60" (1524mm) shelves hold up to 2,400 pounds (1092kg).
- **Stress Resistance:** The high static-load capacity of the HD Super dunnage shelf translates into an increased ability to stand up under the strain of unbalanced loads and the stress of materials repeatedly being placed on the shelf in a less-than-gentle way.
- **HD Super™ Construction:** These dunnage shelves have the same tapered corners and split sleeves that fit the 15/8" (41mm) posts used for other HD Super shelves. As a result, they assemble easily, fit securely and are compatible with 48 different HD Super shelf types and sizes.
- **Two-Piece Design:** Removable wire deck fits over reinforced 1 1/2" (38mm) square, tubular frame. It lifts off for easy, thorough cleaning.
- **Smooth Loading/Unloading:** The front to back upper ribs of the deck allow you to slide items on and off the shelves smoothly.
- **Adjustable:** Rolled grooves on the posts enable dunnage shelves to be positioned or repositioned at desired levels in 2" (51mm) increments.
- **Finishes:** Shelves are available in chrome-plated, Metroseal 3 or Type 304 stainless steel.



*If solid shelves are to be used in a cooler in conjunction with Metroseal™ dunnage shelves and posts, solid shelves should be stainless steel.*



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com



METRO  
HD SUPER™  
Dunnage Shelves — HDR Series


10.67



## HD SUPER™ DUNNAGE SHELVES — HDR Series

### Specifications

- **Shelves:** The shelf support frame is made of 1½" (38mm) square tubing. The removable wire deck is formed from 5/16" (7.9mm) diameter wire.
- **Posts:** Posts have an outside diameter of 1½" (41mm) with rolled grooves in 2" (51mm) increments along entire height. Available in chrome-plated or stainless steel.

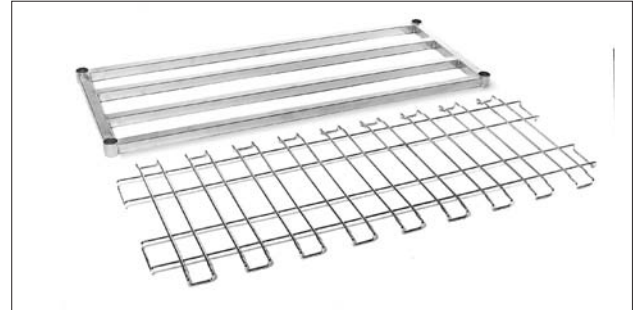

### Dimensions

#### Shelves

Model No. Chrome	Model No. Metroseal 3	Model No. Stainless	Width (in.) (mm)		Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
1848HDRC	1848HDRK3	1848HDRS	18	457	48	1219	35	16
1860HDRC	1860HDRK3	1860HDRS	18	457	60	1524	43	19
2448HDRC	2448HDRK3	2448HDRS	24	610	48	1219	38	17
2460HDRC	2460HDRK3	2460HDRS	24	610	60	1524	47	21

#### Posts

Model No. Chrome	Model No. Stainless	Height* (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
54HPC	54HPS	56	1420	5.8	2.6
63HPC	63HPS	64	1625	6.3	2.9
74HPC	74HPS	76	1930	7.5	3.4

\*Height includes leveling bolt and cap.

#### Cantilever Shelf

Model No. Chrome-plated	Model No. Stainless	Fits Units	Width (in.) (mm)		Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
1254CHC	1254CHS	60" (1524mm) long	12	305	54	1370	11.8	5.4
1260CHC	1260CHS	72" (1829mm) long & 96" (2438mm) long	12	305	60	1524	12.7	5.8

#### Hook

Model No. Chrome-plated	Model No. Stainless	Width (in.) (mm)	Depth (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	
HK23C	HK23S	3/8 9	1 1/16 42	3 3/16 87	0.1	0.04

**Important:** Stability decreases as the ratio of height to width increases when heavier loads are placed on upper shelves. Keep units as wide and low as possible, using the dunnage shelf as the bottom shelf. If two dunnage shelves are being used, both should be placed within the lower half of the unit.

All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



**InterMetro Industries Corporation**  
North Washington Street, Wilkes-Barre, PA 18705  
Phone: 570-825-2741  
Fax: 570-825-2852

L02-031  
Printed in U.S.A. Rev. 11/09

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2009 InterMetro Industries Corp.

For Product Information:  
U.S. and Canada: 1.800.433.2232

Latin America: 1.561.333.3824  
Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003  
Middle East/Africa: +971.4.811.8286