



Item # \_\_\_\_\_

Job \_\_\_\_\_

## PRINTED CIRCUIT BOARD CARRIERS

- **Safe and Practical:** New printed circuit board carriers provide a safe and efficient handling system for delicate circuit boards.  $\frac{5}{8}$ " (16mm) slide spacing on center permits flexibility in separating boards for proper protection. Slides accommodate boards up to  $\frac{1}{8}$ " (3.2mm) thick.
- **Adjustable:** Slide panels are adjustable to exact width of boards to be handled. Moveable retaining bars enable boards to be put in or taken out from either side.
- **Stackable:** Two or three carriers of the same size can be stacked vertically to save floor space.
- **Large Capacity:** Up to 20 full-size boards can be accommodated in each of three different size carriers. With the addition of double-sided center panels, two or more boards can be carried on each level, so carriers can hold from 40 to 80 12"x6" (305x152mm) boards.
- **Easily Transported and Stored:** PCB carriers can be transported and stored in a variety of modified and standard products made by InterMetro:
  - In PT Series tote box carriers;
  - In enclosed mobile cabinets;
  - In adjustable undershelf slides made to fit standard Super Erecta Shelf® shelf carts and trucks.
- **Conductive:** Made of chrome-plated carbon steel.



CBC11C



CBC11C with Center Panel




**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com

# PRINTED CIRCUIT BOARD CARRIERS



*Two CBC11C's  
Stacked*

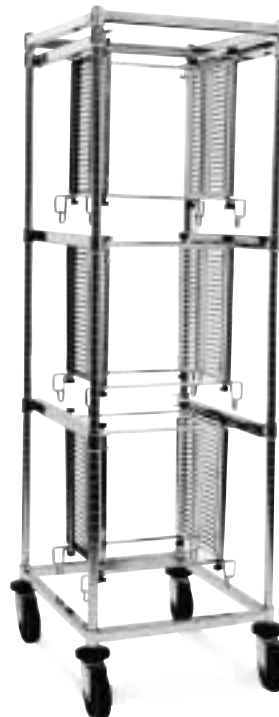

*Three CBC11C's  
in PT1C-5M Tote  
Box Carrier  
(Capacity six  
CBC11C's. Two-  
and three-bay  
Tote Box Carriers  
also available).*

## Dimensions

Cat. No.	Length/Width/Height		Approx. Pkd. Wt. Per Unit		Maximum Board Size		Capacity with Full-Size Boards	Capacity with 12"x6" (305x152mm) Boards
	(in.)	(mm)	(lbs.)	(kg)	(in.)	(mm)		
CBC11C	17 <sup>1</sup> / <sub>2</sub> x12 <sup>1</sup> / <sub>2</sub> x18 <sup>3</sup> / <sub>16</sub>	444x317x462	10	4.53	13x12	330x305	20	40 (1 Center Panel)
CBC13C	24 <sup>1</sup> / <sub>4</sub> x12 <sup>1</sup> / <sub>2</sub> x18 <sup>3</sup> / <sub>16</sub>	616x317x462	10 <sup>3</sup> / <sub>4</sub>	4.87	19 <sup>1</sup> / <sub>4</sub> x12	489x305	20	60 (2 Center Panels)
CBC14C	31x12 <sup>1</sup> / <sub>2</sub> x18 <sup>3</sup> / <sub>16</sub>	787x317x462	11 <sup>3</sup> / <sub>5</sub>	5.25	26 <sup>1</sup> / <sub>8</sub> x12	664x305	20	80 (3 Center Panels)

### Center Panel with Double Slide

Cat. No.	Length/Width/Height		Approx. Pkd. Wt. Per Unit	
	(in.)	(mm)	(lbs.)	(kg)
CBCP2C	7 <sup>7</sup> / <sub>8</sub> x12 <sup>1</sup> / <sub>2</sub> x15 <sup>1</sup> / <sub>8</sub>	22x317x384	6	2.7

Load Rating: 5 lbs. (2kg) per slide, not to exceed 75 lbs. (34kg) per carrier.

Manufactured by:



### InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: [www.metro.com](http://www.metro.com)

L02-133  
Rev. 9/00  
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.